Electrolux | ICON®

Designed for the well-lived home.

# Full-Gas Freestanding Range

## **E30GF74HPS** professional series





### Smooth-Glide™ Oven Racks

Imagine oven racks that glide with unparalleled ease and extend fully for effortless access to your meal. Designed with a centered easy-grip handle and a patented ball bearing rack system for smooth-gliding performance with the touch of a finger.




### Min-2-Max™ Sealed Burner

Burner configuration includes a versatile Min-2-Max™ sealed burner delivering anywhere from 18,000 to 450 BTUs. Thanks to the double ring configuration, you can whisk delicate sauces or bring water to a rapid boil. You decide the level of heat output by a simple turn of the burner knob.



### Sealed Rangetop

One look says it all. This superior gas-through-ceramic glass surface is durable, smooth and easy to clean. The glass ceramic surface easily buffs to a glossy shine. Imagine the beauty this sleek, glistening rangetop will bring to your kitchen.



### European Convection System

By adding a third cooking element and a convection fan, heat is distributed evenly throughout the oven. Cooking every meal to perfection has never been easier.

### 30" FULL-GAS FREESTANDING RANGE


| | |
|---|---|
| **CONTROL PANEL FEATURES** | |
| Manual Oven Control | Yes |
| Professional-Style Stainless Steel Console | Yes |
| Large Professional Skirted Knobs with Bezel | 6 |
| **RANGETOP FEATURES** | |
| Min-2-Max™ Dual-Ring Sealed Burner (BTU) | 1 (18,000 – 450) |
| Sealed Power Burner™ (BTU) | 1 (14,000) |
| Sealed Precision Burner™ (BTU) | 1 (9,500) |
| Sealed Precision Burner™ (BTU) | 1 (5,000) |
| Full-Length Grates (front to back) | 2 |
| Electronic Ignition | Yes |
| **OVEN CAVITY FEATURES** | |
| Capacity | 4.2 Cu. Ft. |
| Manual-Select Fan Convection Cooking Mode | Yes |
| Bake Burner (BTU) | 1 (18,000) |
| Infrared Broiler System (BTU) | 1 (11,500) |
| Convection Burner (Watts) | 350 |
| Cobalt Blue Interior | Yes |
| Self-Clean with Door Lock | Yes |
| Cook Modes – | |
| Bake | Yes |
| Broil | Yes |
| Convection Bake | Yes |
| Convection Roast | Yes |
| Halogen Oven Lights | 2 |
| Smooth-Glide™ Racks | 2 |
| Conventional Racks | 1 |
| **ADDITIONAL FEATURES** | |
| 6" Stainless Steel Backsplash | Yes |
| Full Stainless Steel Side Panels | Yes |
| Professional Handle | Yes |
| Fully Adjustable Leveling Legs | Yes |
| **ACCESSORIES** | |
| Broiler Pan and Insert | Included |
| Stainless Steel Cleaner | Included |
| Griddle | Included |
| Wok Ring | Included |
| Simmer Plate | Included |
| 4" Stainless Steel Kickplate – 318352601 | Optional |
| Stainless Steel Island Trim Kit – 903132-9010 | Optional |
| Black Knobs Kit – 903108-9010 | Optional |
| **SPECIFICATIONS** | |
| Oven Cavity Dimensions – | |
| Height | 16-1/2" |
| Width | 24-1/8" |
| Depth | 18-1/32" |
| Overall Exterior Dimensions – | |
| Height (Including Adjustable Legs) | 41-5/8 – 42-5/8" |
| Width | 29-7/8" |
| Depth (Including Handle)<br>(with 90° Door Open) | 28-5/8"<br>45-34" |
| Gas Supply Connection Location | Center Bottom Rear |
| Power Supply Connection Location | Right Bottom Rear |
| LP Conversion Kit | Included |
| Voltage Rating | 120V/60Hz/15 or 20A |
| Connected Load (kW Rating) @ 120 Volts‡ | 0.6 |
| Product Weight | 268 Lbs. |
| Shipping Weight (Approx.) | 295 Lbs. |

**For use in place of backsplash*

*‡For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.*

*NOTE: Always consult local and/or national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.com.*

Specifications subject to change.

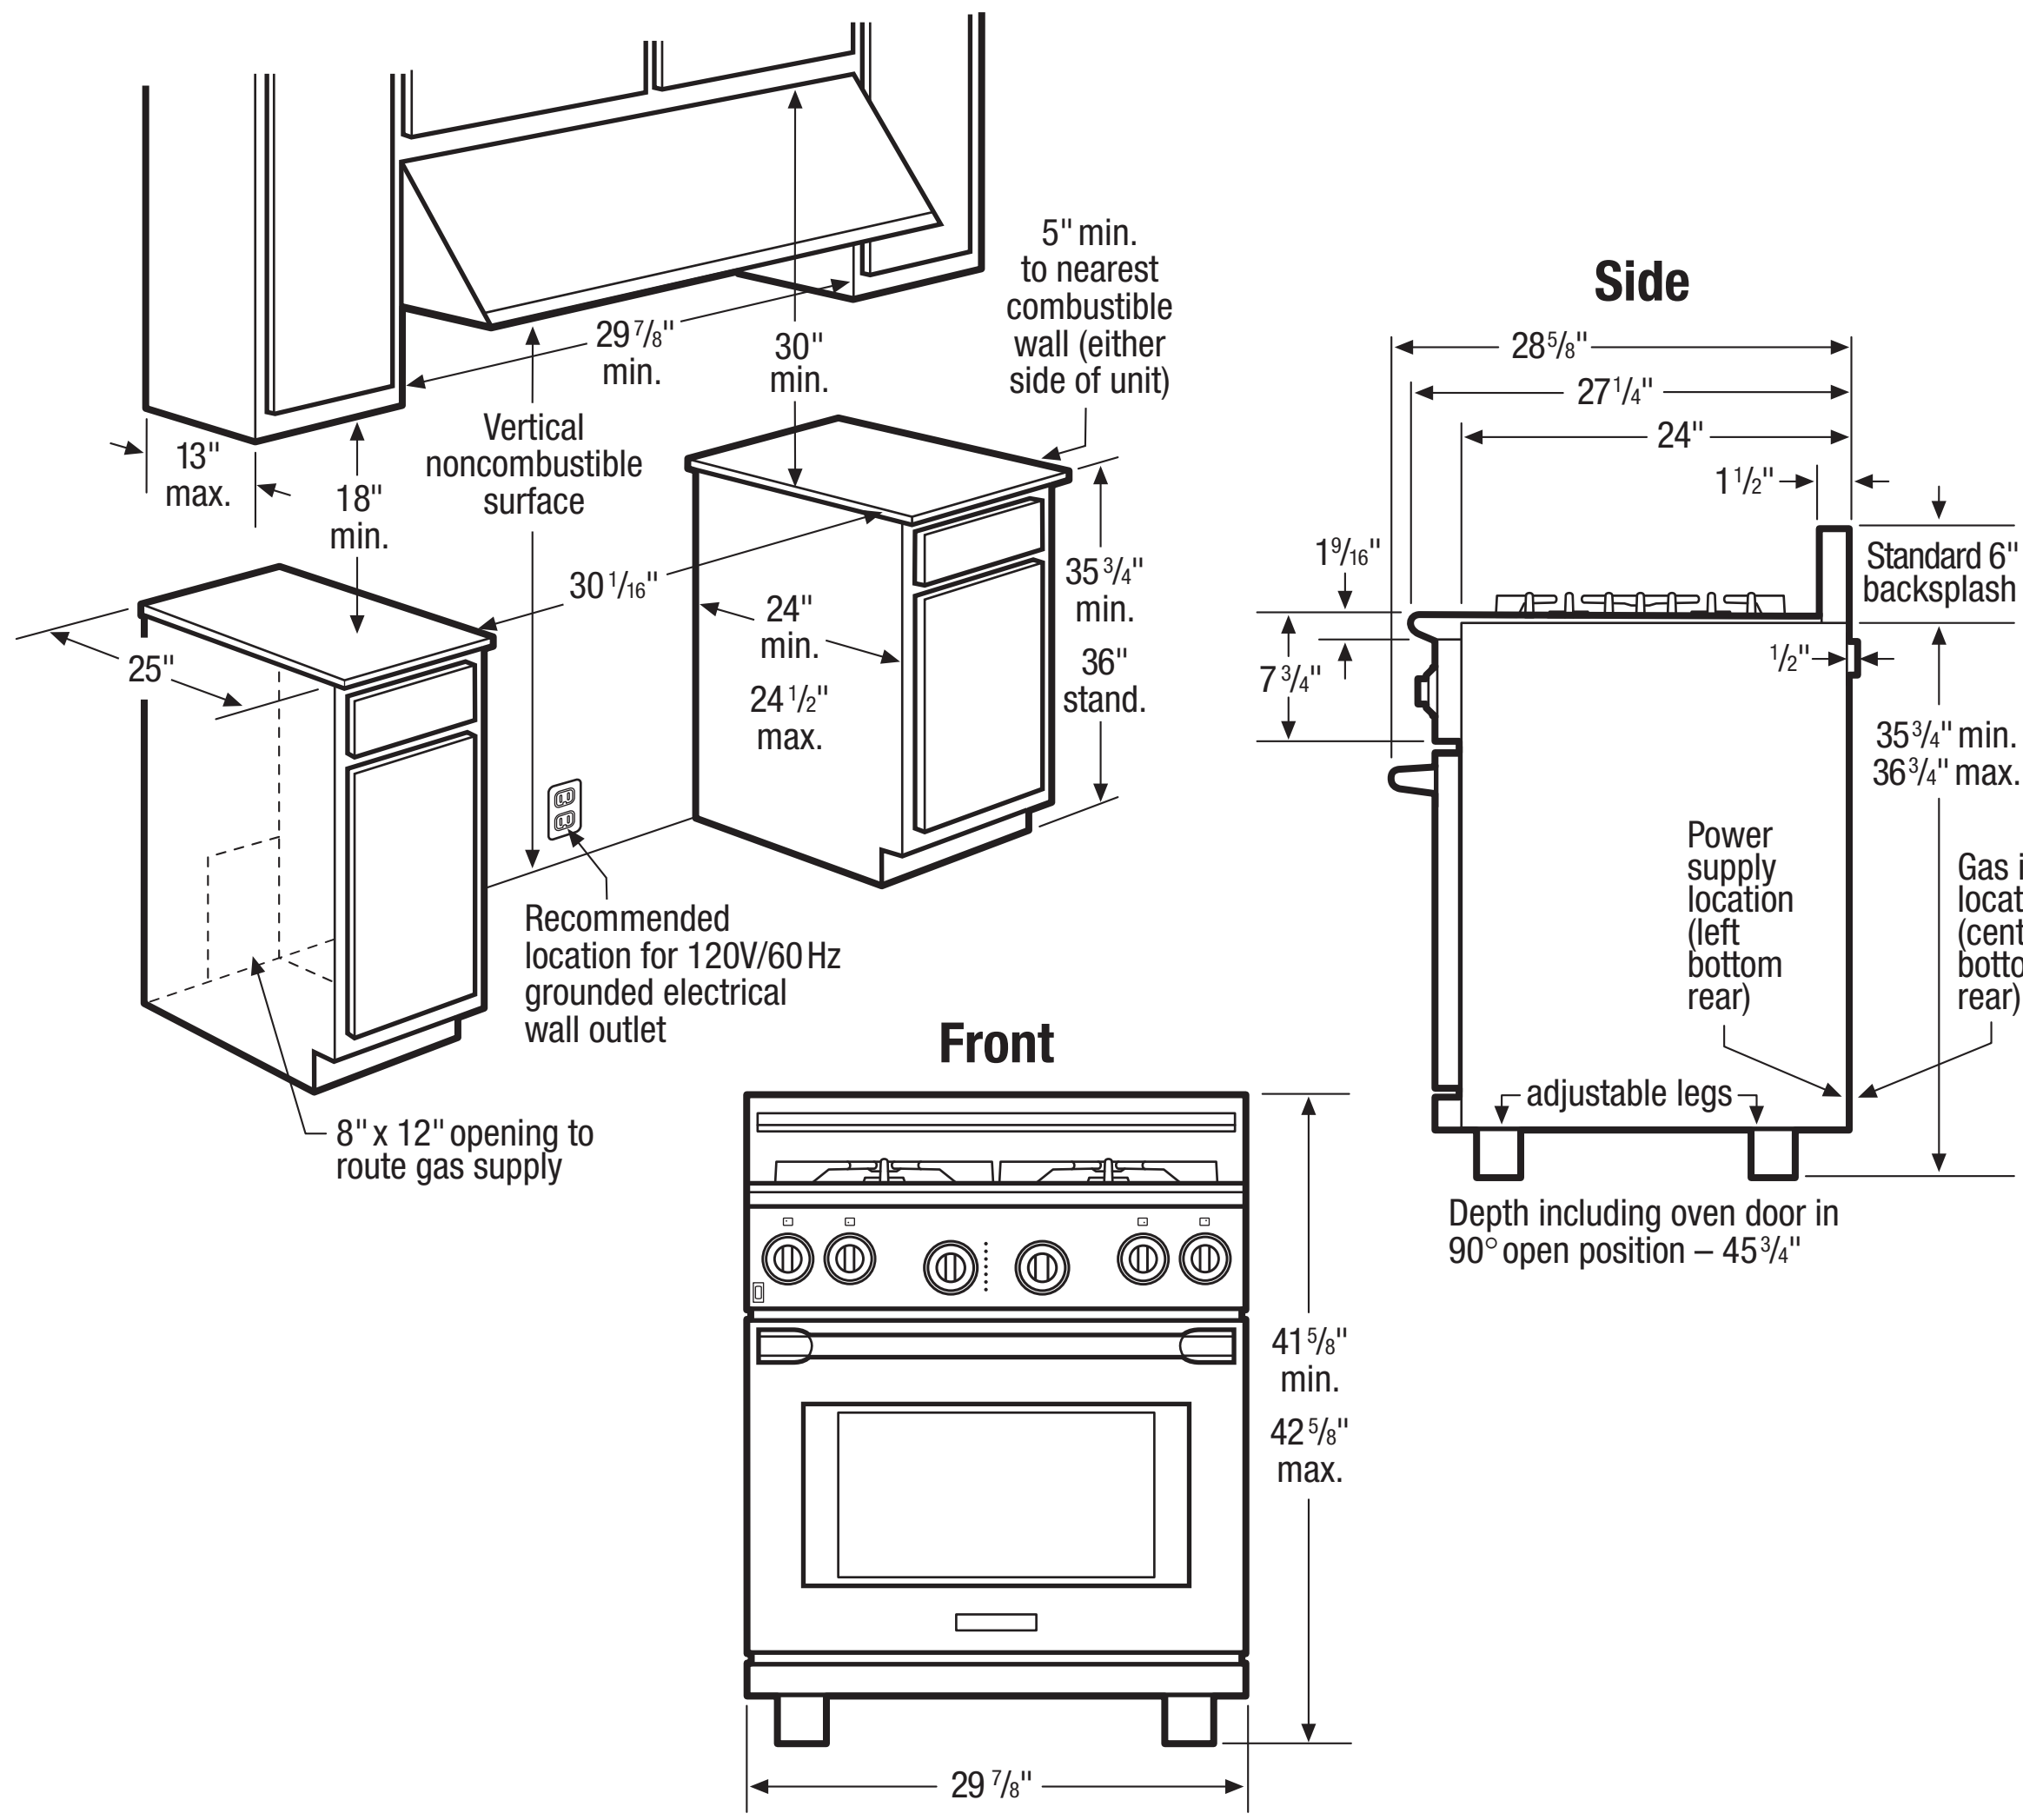


### 30" Full-Gas Freestanding Range Specifications

- Product Weight – 268 Lbs.
- Voltage Rating – 120V / 60 Hz / 15 or 20 Amp
- Connected Load (kW Rating) @120 Volts = 0.6 kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @120 Volts = 7 Amps
- Always consult local and/or national electric and gas codes.
- Range ships with 3/4" factory regulator.
- Lp conversion kit supplied.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 34" minimum clearance between top of rangetop and bottom of unprotected wood or metal overhead cabinetry.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Allow 5" minimum clearance from edge of rangetop to nearest combustible wall on either side of unit.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install vent hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

***Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.***

### Optional Accessories

- Stainless Steel Island Trim Kit *(for use in place of backsplash)* – (903132-9010).
- 4" Stainless Steel Kick Plate – (318352601).
- Black Knobs Kit – (903108-9010).

**Electrolux Major Appliances, N.A.**

**USA** • 250 Bobby Jones Expressway • Augusta, GA 30907 • 1-877-4electrolux (1-877-435-3287) • **electroluxicon.com**
**CANADA** • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • **electroluxicon.ca**





Printed in the U.S.A.